



專利所有仿冒必究

產品特色

- 適用於配電線路中的過載保護和短路保護



尺寸：38*Ø10.3mm 重量：10g

電氣特性

額定電流的%	熔斷時間
100%	4 hours min.
135%	60 minutes max.
200%	120 seconds max.

詳細規格

機型	額定電流	額定電壓	分斷能力	耗散功率	熔化熱能
16-PHV1100M	1A			1.3W	0.4A ² .S
16-PHV1200M	2A			1.1W	3.4A ² .S
16-PHV1300M	3A			1.3W	12A ² .S
16-PHV1350M	3.5A			1.4W	20A ² .S
16-PHV1400M	4A			1.5W	28A ² .S
16-PHV1500M	5A			1.6W	50A ² .S
16-PHV1600M	6A	1000 VDC	UL 10kA at1000VDC IEC 33kA at 1000VDC	1.8W	93A ² .S
16-PHV1800M	8A			2.2W	33A ² .S
16-PHV2100M	10A			2.4W	70A ² .S
16-PHV2120M	12A			2.9W	200A ² .S
16-PHV2150M	15A			3.0W	230A ² .S
16-PHV2200M	20A			3.5W	330A ² .S
16-PHV2250M	25A			4.2W	500A ² .S
16-PHV2300M	30A			5.6W	2500A ² .S



專利所有仿冒必究

UL 標準

UL248-19

安規標準




工作環境


工作溫度範圍

-55 ~ 125°C, 周圍溫度

機構圖



時間-電流曲線

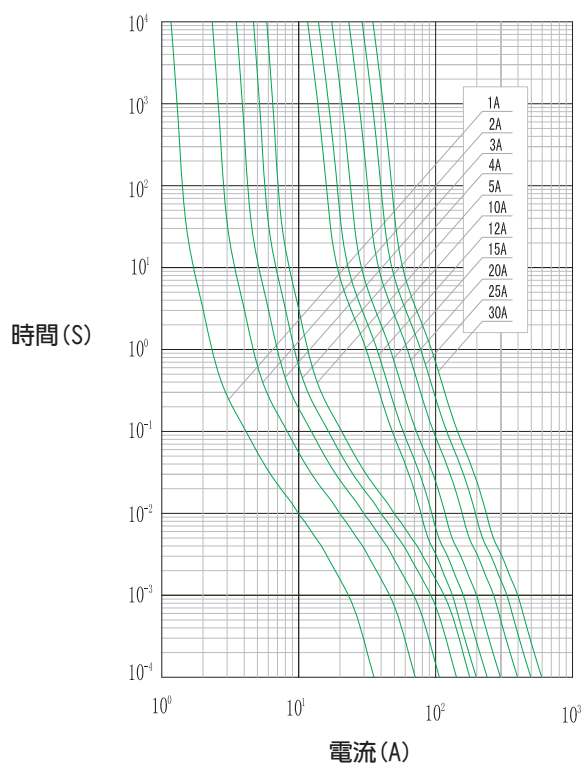

備註

1. 本公司沒有事前通知情況下，保有規格修改之權利