




Features

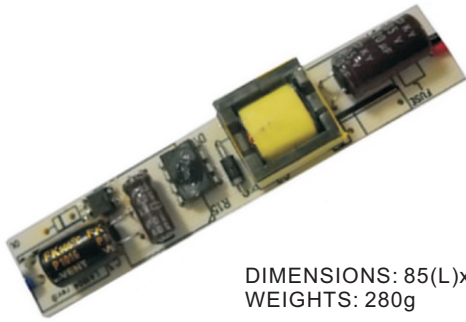

DIMENSIONS: 85(L)x16(W)x10(H)mm
WEIGHTS: 280g

- **Constant Current designed**
- **Convection cooled**
- **Internal short, overload, overheat Protection**
- **100% burn-in test**
- **Apply for LED Light**
- **2 years Warranty**
- **Output modify range: 3V~100VDC**
- **Non-isolation, Low price, High efficiency**

General specifications

INPUT

Input range	100~240VAC
Input frequency	47~63Hz
Inrush current (25° C)	20A/ 110VAC 40A/ 220VAC

OUTPUT

Hold-up time	5mS
Short protection	Autorecovery
Overload protection	44V~46V

Detail specifications

4 ~ 9 Watts (constant current)

MODEL	O/P Volt	Load(Current) ¹	Current Load Adj. ²	Current Line Adj. ³	Efficiency ⁴
		Rated			
LA1004-24SN	V1: +12V~26V	150mA±5%	±5%	±5%	84% Ref.
LA1009-24SN	V1: +12V~26V	360mA±5%	±5%	±5%	84% Ref.

Environments

Operating Temperature	-15 ~ 50°C, Ambient
Operating Humidity	5 ~ 95% RH, No Condensing
Storage Temperature	-40 ~ 85°C, Ambient

- NOTE:**
1. Each output can provide up to maximum load, but total load can not exceed rated output power.
 2. The load adjustment is measure under 220VAC Input. In accord with Constant Voltage (CV mode)to test.
 3. Efficiency is measured at rated load and 220VAC/60Hz/25°C input.
 4. Reign Power reserve the right to change specifications at any time without notice.